



Stainless Steel Playtop Home PARTS LIST

Instructions online at www.prevuepet.com

CUSTOMER SUPPORT

For assistance or replacement parts, please contact Prevue Pet Products:

PHONE 1 (312) 243-3624

ONLINE www.prevuepet.com

EMAIL customerservice@prevuepet.com

HARDWARE INCLUDED:



Phillips-head screws 18 pcs (installed in place on cage panels) *



Hex screws 4 pcs (installed in place on playtop supports)



Knobs 4 pcs (installed in place on cage & playtop bar)



Casters 4 pcs

* (plus 2 bagged extras)


TOOLS INCLUDED:


Allen wrench





TOOLS NOT INCLUDED:

Phillips-head screwdriver



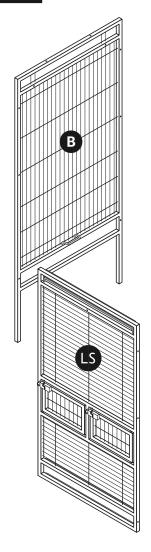

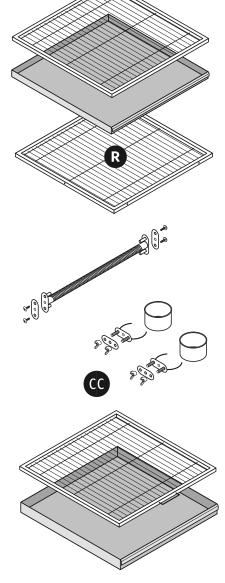

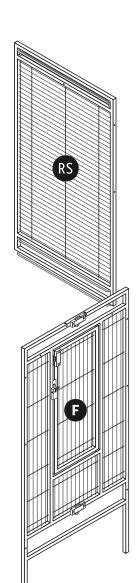

KEY:

B = Back panel

LS = Left Side panel

F = Front panel

RS = Right Side panel

R = Roof grille

C = Casters

PC = Playtop Components

CC = Cage Components



Instructions online at www.prevuepet.com

CUSTOMER SUPPORT

For assistance or replacement parts, please contact Prevue Pet Products:

PHONE 1 (312) 243-3624 ONLINE www.prevuepet.com **EMAIL** customerservice @ prevuepet.com

TOOLS NEEDED: Phillips head screwdriver • For best results, follow Assembly Steps in order presented.

KEY:

B = Back panel

F = Front panel

LS = Left side panel

RS = Right side panel

R = Roof grille C = Casters

CC = Cage

Components

PC = Playtop


Components








Screws are installed in place. When attaching panels or components,

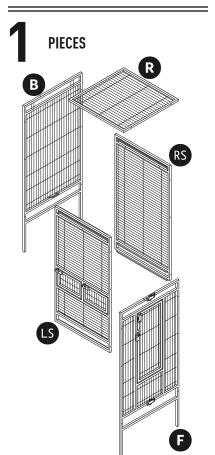


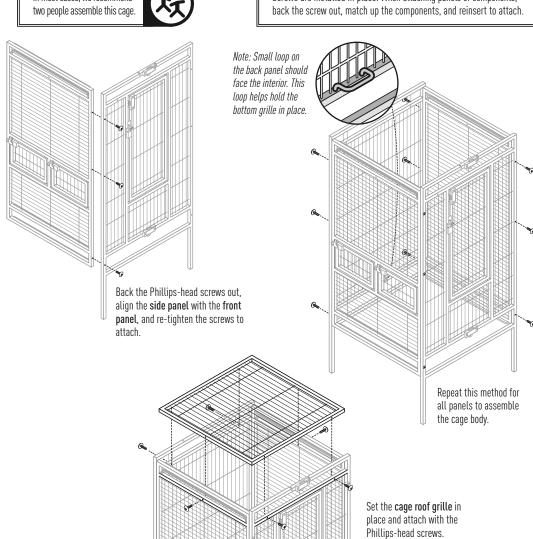






While the lockable rolling casters can be added at any point in the assembly, we recommend installing them at this time.




Screw the threaded caster post into the frame leg at each corner. If preferred, tighten each caster with a slim wrench.

3 PIECES



Perch:

Hold the perch in place in the cage interior. Install a Phillips-head screw through the bracket, through the cage wire, into the perch bracket and tighten with a Phillips screwdriver for all four screws.




Cups/cup holders:


Open the cup door.
Insert the screw posts on the cup holder through the door mesh, add the bracket on the outside, and tighten to the doors with the wing nuts.

Place the deep cups into the holders.

Grille and tray:
Open the grille lock.
Slide the grille
(with handle) into
the top channel and
the deep tray into
the bottom channel.



PIECES



Remove the hex screws from the ends of the perch bar supports.

Install the perch bar supports on the back panel of the cage.


Back the Phillips-head screws out on the underside of the perch bar and attach the cup holders.




Attach the **perch bar** to the support rails using the hex screws and the allen wrench.

Insert the shallow cups.

Open the grille lock. Slide the **thin grille** into the top channel and the **shallow tray** into the bottom channel.



Loosen the knob screws on the perch bar rail and along the cage front. Insert the ladder and re-tighten the knob screws.



When fully assembled, check and tighten ALL screws and wing nuts over the entire cage to ensure a safe and stable home.

Assembly completed.

