

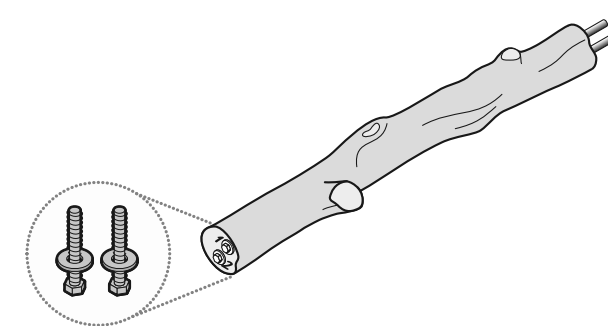


TOOL REQUIRED: Crescent Wrench or Socket Wrench with 1/2" (12 mm) Socket • For best results, follow Steps in order.

**1** PIECES

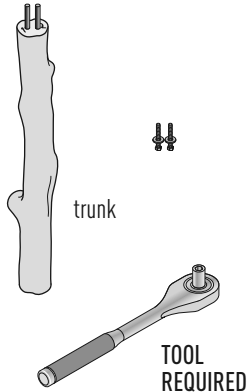


\* Your hardware pieces (2 bolts, 2 washers) are installed in the base of the trunk.

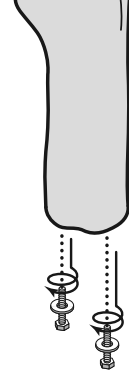


With a crescent wrench or socket wrench with 1/2" (12 mm) socket, completely remove the bolt/washer hardware from the trunk.



**2** PIECES

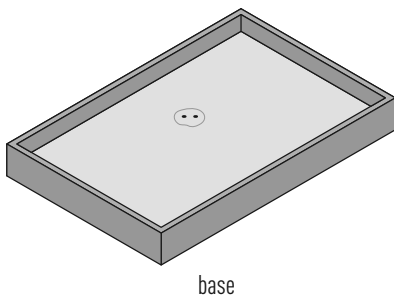

On the floor of the base, you will see a pencil outline of the trunk.



On the underside of the base and of the trunk, you will find handwritten "1" and "2" marks. All of these markings will help you with correct placement of the trunk on the base.




Leave the washers on the bolts.

Align "1" with "1" and "2" with "2", and, from the bottom of the stand, push the bolt/washer combos up, through the holes, into the threaded holes in the base of the trunk, and hand-tighten as far as possible.



Finish tightening with the socket or crescent wrench.

\* Tighten only to the point of being snug. Overtightening may damage the integrity of the base wood.

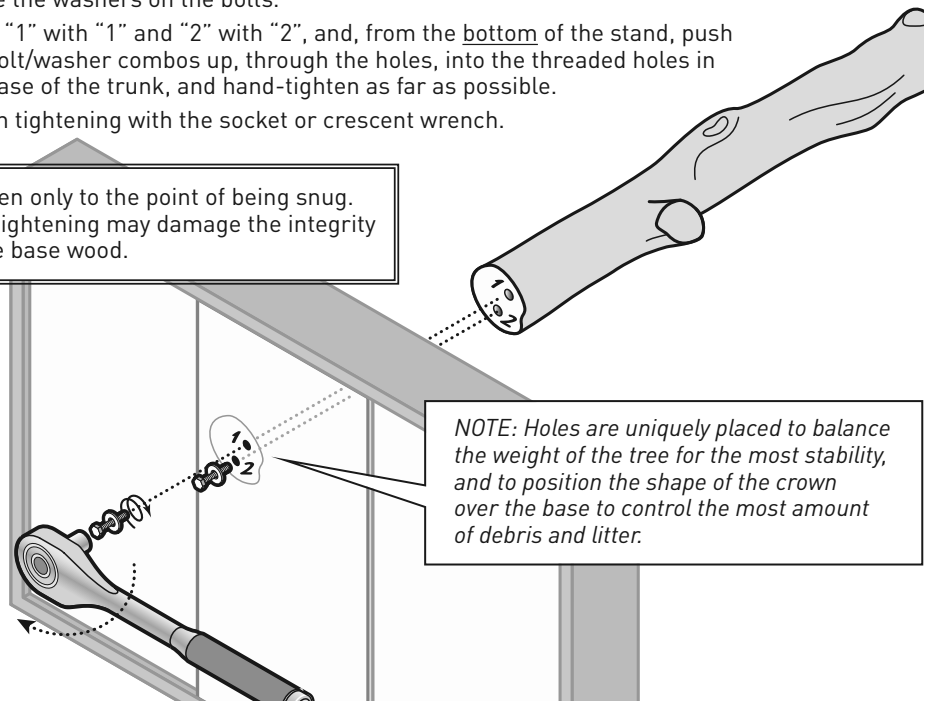


NOTE: Holes are uniquely placed to balance the weight of the tree for the most stability, and to position the shape of the crown over the base to control the most amount of debris and litter.

# 3 PIECES

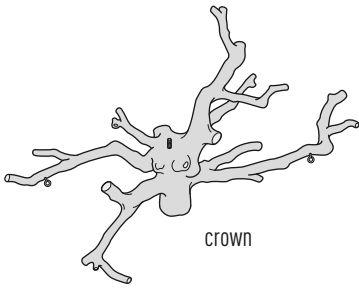

On both ends of the crown and trunk, you will find handwritten "1" and "2" marks to help you match up and align the pieces correctly.

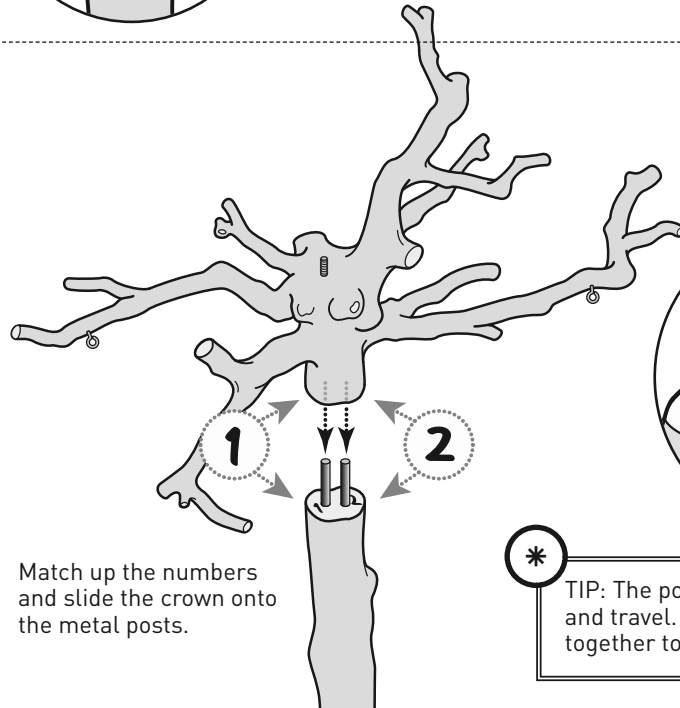



Match up the numbers and slide the crown onto the metal posts.

**\*** TIP: The posts may have spread over time and travel. It may help to pinch the posts together to align the posts with the crown.

# 4 PIECES



Screw the food/ water cup onto the pre-installed threaded post on the crown. Tighten until snug. Do not overtighten, as it may weaken the cup base.

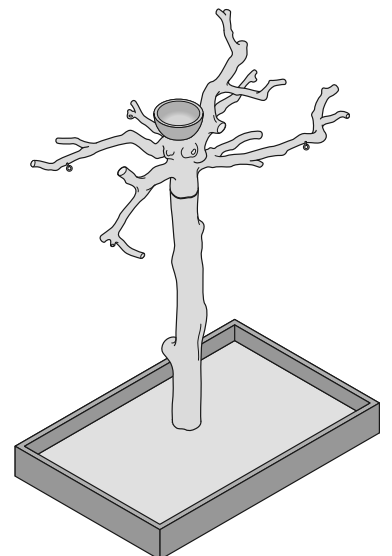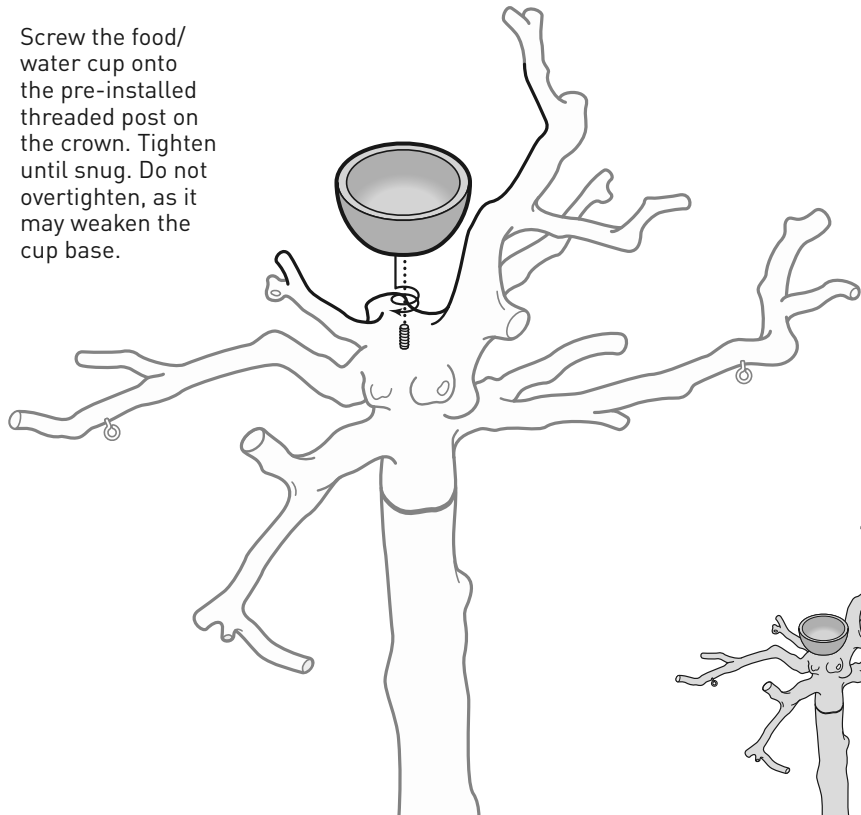

Assembly completed. ■